
Product Range Mobility solutions





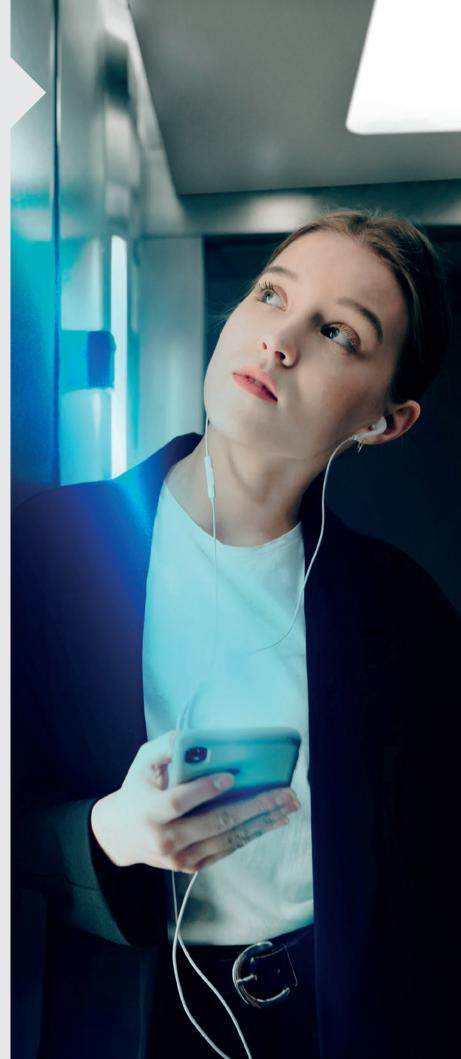

Contents

ABOUT KLEEMANN

| Mission | 3 |
|-------------------|---|
| Innovation | б |
| Brand values | 7 |
| Corporate pillars | 8 |
| | |

SERVICES & TOOLS

| KLEEMANN Hub | 12 |
|---------------------|----|
| KLEEMANN Portal | 14 |
| KLEEMANN E-shop | 16 |
| KLEEMANN Academy | 17 |
| KLEEMANN Design | 18 |
| Design your Lift | 20 |
| After Sales Service | 22 |
| | |

FEATURES & UPGRADES

| KLEEMANN Live | 26 |
|----------------------------|----|
| Green lifts | 28 |
| Hygiene Line | 30 |
| Anti – Vandal | 32 |
| Earthquake Resistant | 32 |
| Destination Control System | 33 |
| Firefighting | 33 |

PRODUCTS

| Thobocity | | IVIOVIII |
|---|-----|------------|
| Elevators | | KT |
| Passenger lifts | | KT KT |
| FlexyLIFT R | 36 | IX I |
| Atlas Basic | 38 | |
| Atlas RPH R | 40 | |
| Atlas Gigas R | 42 | Parking |
| HRS | 44 | Car lifti |
| | | KT |
| Homelifts | | KT |
| Maison100 E | 46 | C . |
| Maison100 H | 48 | Scissor |
| Maison200 H | 50 | Sin |
| | | Do |
| Freight lifts | | Vehicle |
| Hydraulic | 52 | Vel |
| Atlas Super Gigas | 54 | VC |
| Comparative | 5.6 | Parking |
| technical chart | 56 | UN |
| | | Hy |
| | | Hy |
| Modernization solutions | 58 | Hy |
| Modernization solutions | 20 | |
| | | Puzzle |
| | | BD |
| Accessibility solutions | | Indepe |
| FreeSTAIR with seat | 64 | UN |
| FreeSTAIR for wheelchair | 66 | UN |
| | | Sta |
| | | Sta |
| Escalators & Moving walks | | 510 |
| Escalators & Moving walks Escalators | | |
| KEC Commercial | 70 | Marine |
| NEC COMMERCIAI | /0 | |

| alators | |
|----------------|----|
| KEC Commercial | 70 |
| KEH Heavy Duty | 70 |

| KTC Commercial KTH Commercial KTW Heavy Duty | 71 |
|--|----|
| | 71 |
| KTW Heavy Duty | 71 |
| | 71 |
| Parking Systems | |
| Car lifting systems | |
| KTS 2200 | 74 |
| KTS 3000 | 74 |
| | |
| Scissor lift platforms | |
| Single Scissor Platform | 75 |
| Double Scissor Platform | 75 |
| Vehicle Turntable | |
| Vehicle Turntable | 76 |
| Parking systems | |
| UN 1+1 | 77 |
| Hydro Park 1127 | 77 |
| Hydro Park 1123 | 77 |
| Hydro Park TPTP-2 | 77 |
| Puzzle parking systems | |
| BDP-2 | 78 |
| Independent Parking Systems | |
| UN LPS | 79 |
| UN OPS | 79 |
| Starke 2127 | 79 |
| Starke 2227 | 79 |

| arine solutions | |
|---------------------|----|
| Passenger Elevators | 82 |
| Crew Elevators | 83 |



A world of motion where everything is possible

Since day one, back in 1983, our core aim has been clear. To create, together with our partners, a better mobility experience for people, through lifts that excel in safety, technology, innovation, efficiency and aesthetics. Today KLEEMANN is amongst the most important lift manufacturers in European and global markets, with products and applications that range from residential and commercial lift systems for persons or freight, to escalators, moving walks, accessibility solutions, marine lifts and lift components.



More than just lifts

Think of life as a powerful force for evolution. Lifts not only move people and freight to the next floor. They are actually moving life, taking part in all its social and economic aspects.

Life-space mobility has transformed, and moving with ease and safety inside buildings has become more important than ever.

KLEEMANN products are the yield of distilled experience and compact knowledge of how people move and interact. Going beyond nuts and bolts and in the era of digital transformation and sustainability, KLEEMANN lifts are spaces that merge the physical aspect of life with the digital factor. Contemporary solutions that serve and facilitate current life and lead it to the future.





The spirit of innovation

Innovation is key to every KLEEMANN operation, from engineering and technologies, to creating smart and digital tools. Over time, the company has invested in state-of-the-art testing towers and in the integration of IoT and energy saving technologies, production automation and new digital processes.

Inspiring values

KLEEMANN values are interwoven with the company activities. They are reflected in the management model and in the entire range of its operations.

Safety

We take all necessary measures to ensure the health and safety of our personnel, customers and users when using our products and within our premises.

Passion for People

The well-being of our colleagues and customers is of utmost importance to us. We invest in the strength of the bond between the company and its personnel. We are truly passionate about what we do and we strive to create opportunities for personal and professional development for all.

Trust

Breakthrough Culture

Innovation, growth, development and improvement are all vital to our business model. We set high goals, we commit to them, we take risks and we determinedly turn any opportunity into a learning experience. We are not afraid to fail.



We do what we say and we say what we do. We place trust in our people and their abilities. At KLEEMANN, we are a united front. We are all aligned with each other and with our vision.

The high and consistent quality of KLEEMANN production processes, products and services is a non-negotiable commitment. At KLEEMANN, we implement a complete Quality Assurance System that meets all safety and quality standards and exceeds typical requirements. We apply more than 80 internal procedures and

> EN ISO 10002: 2014 Quality Management -**Customer Satisfaction**

EN ISO 45001: 2018 Occupational Health and Safety Management System


EN ISO 14001: 2015 Environmental Management System

EN ISO 14006: 2011 Eco design standard

People at the heart

Seeing and understanding human activity, makes KLEEMANN create solutions based on real wants and actual needs. This dedication to excellence in the service of people, is reflected in all decisions and initiatives.

Strong focus on values such as trust, responsibility and loyalty towards employees, customers, users and business partners, has been recognised by the industry through various awards related to corporate value, coaching, customer service, Health & Safety and Best Workplaces.

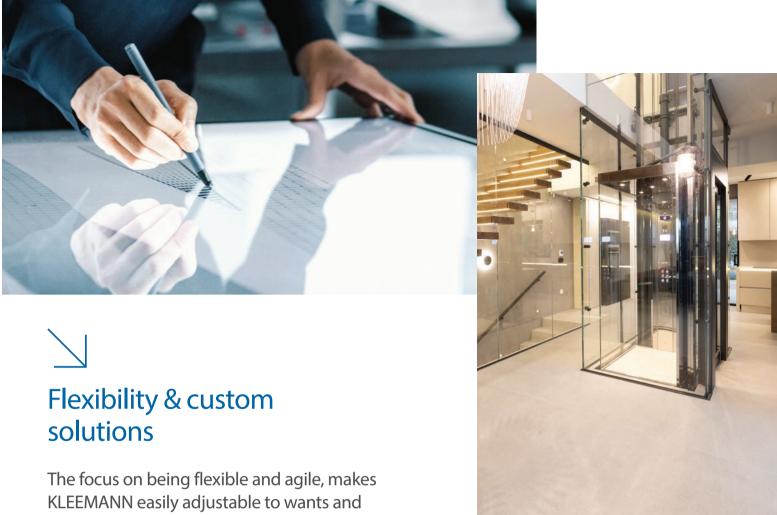

prerequisites. Any scale project around the world can be served with pre-engineered or fully customized solutions that target to a superior vertical mobility experience.

Expanding the people-oriented approach to environmental protection, KLEEMANN prioritizes sustainable growth and applies practices of responsible energy use. Energy efficiency and transition to sustainable energy are moving corporate action, production and everyday activities.

Sustainable

growth



Effortless customer experience

With experience, know-how and real dedication in understanding customer needs, KLEEMANN is offering a carefree customer journey. Business is easier with KLEEMANN.





Services & Tools

KLEEMANN Hub KLEEMANN Portal KLEEMANN E-shop KLEEMANN Academy KLEEMANN Design Design your Lift After Sales Service

Services & Tools **KLEEMANN Hub**



My settings

тнеме

DARK MODE


FILTERS

Notifications period

YYYY-MM-DD

KLEEMANN Hub

One operation center for all KLEEMANN digital tools. Offering quick access, the Hub is a user-friendly connection space, easy to navigate and control, with customizable environment and clean-cut design. KLEEMANN Hub will become your daily routine.

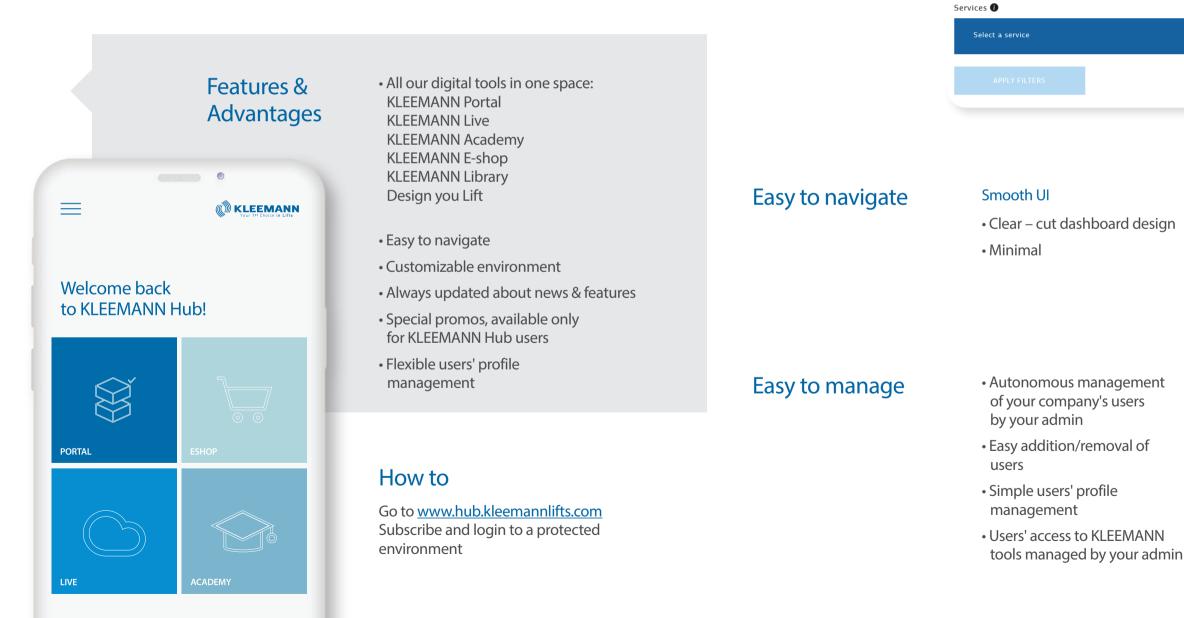

| | | | 0 %Å | 6 | °C- | 0 4 | |
|------------|--------------------------------|--------|--------|--------|-------------------|------------|--|
| | My settings THEME | | | • | | | |
| | DARK MODE Tert size | SMARL. | меония | LAACE | • | 017 XI, | |
| OFF | ENABLE TOOLTIPS LANCUAGE | | | Englis | ou A / English | | |
| | | | | | | | |
| YYYY-MM-DD | | | | | | | |
| | | ~ | | | | | |
| | | | | | | | |


Customizable design • 7 available theme options • 4 text size options • 8 languages (EN, GR, DE, FR, RU, CN, PL, SP) **Notifications** View notifications or promos by Date or by App

Services & Tools **KLEEMANN Portal**



KLEEMANN Portal

Designed and developed for maximum ease, KLEEMANN Portal is an innovative online tool that allows you to quickly and easily create detailed designs, view changes in real time, receive guotes and order lifts tailored to any project in just a few minutes

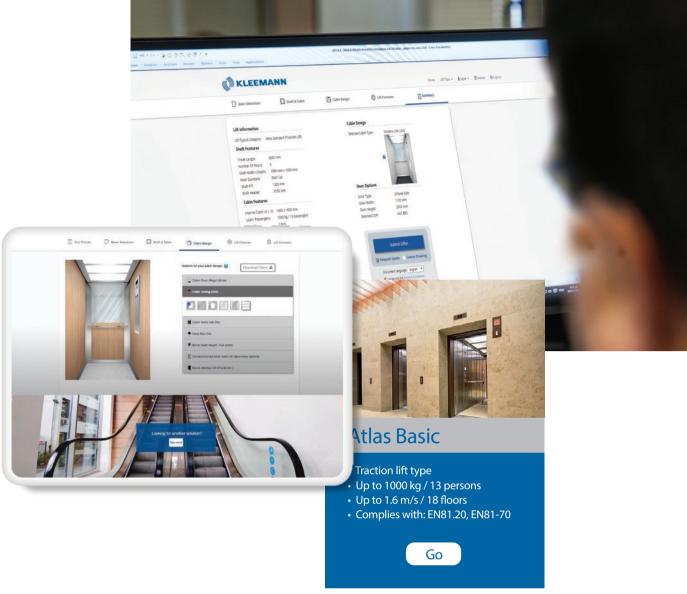



All popular **KLEEMANN** products available, online, at the best price

Highlights

- Offer available in 5 minutes
- Planning data available in 10 minutes
- Online order
- Upgraded user experience
- Fast delivery time

Features

- Detailed designs and quotes
- Integrated cabin design options. Real-time changes
- Optimum solutions for the given dimensions of the shaft
- Realistic 3D plans and views. **Real-time changes**
- Auto correction
- Installation plans generated by the KLEEMANN Portal
- Responsive web design
- Offer request for products that are not available for order through enquiry forms

Order online

Atlas Basic Atlas Gigas R Atlas RPH R FlexyLIFT R Maison100 H Maison100 E Maison200 H Core Lift (Available only online)

Contact your sales tablet or mobile device representative

to get access from your desktop,

Services & Tools **KLEEMANN E-shop**



KLEEMANN E-shop

A quick and easy tool to upgrade the ordering process for spare parts. It serves inquiries for orders supplied by KLEEMANN and for stock orders through a wide available range.

KLEEMANN Academy

Features & **Advantages**

How to

- Quick & easy ordering
- Fast service via simple procedures
- Instant updating about the order status

Go to www.kleemannlifts.com and register to access the E-shop

- View the analysis of the automatic door equipment according to the order's specifications
- Order manufacturing equipment for your original order
- Place order for spare parts that require custom production procedures, by visiting the SPECIAL **INOUIRY** section
- Visit the SPECIAL INOUIRY section also for any spare parts, not listed in the E-shop

Getting the knowledge, remotely







KLEEMANN Academy is an online education platform for lift technicians, designed to remotely offer training on KLEEMANN lifts. By joining the Academy, the visitor gains access to easy, useful, educational content, takes part in virtual events and upgrades knowledge on the KLEEMANN world of lifts.

- Live webinars
- Educational material
- Live events on product installation
- Self-paced, downloadable lessons
- Email notifications concerning new courses
- Constant update on any technical changes & training priority
- Customized Learning Path creation for technicians, according to specific needs
- Limited period accounts for subcontractors
- KLEEMANN certification with the completion of each lesson
- A 360° report system on each team member's progress

For more information on KLEEMANN Academy contact: academy@kleemannlifts.com

Services & Tools **KLEEMANN** Design



KLEEMANN Design

Design is for people. Every project KLEEMANN undertakes, is an opportunity to provide solutions of aesthetic excellence, covering all engineering prerequisites, adapting to regulations and taking the best out of any apparent restriction.



A special Design Team serves as the creative force behind the development of lifts for any challenging project. Our designers combine solution-oriented design with a servicedriven approach, delivering:

Creative power

Design has to integrate reality, foresee tomorrow and create an elevated user experience. Rather than thinking of an elevator as a box that moves, we see it as an active social space in a building, that is used and lived by people.

Industrial designer Andreas Zapatinas joined the creative forces of KLEEMANN in 2007 and new technical and aesthetic solutions have been explored. Since then, the experienced KLEEMANN Design Team has build on these fundamental ideas taking KLEEMANN lifts to the next level.



Custom solutions

KLEEMANN enjoys a favorable worldwide reputation for its customized design expertise. KLEEMANN offers pre-engineered or fully-customized elevators, to perfectly fit in each and every project. Being vertically integrated, KLEEMANN designs and manufactures in a way that enhances expertise and flexibility to respond reliably, quickly, precisely, and cost effectively to customer's specifications.

design@kleemannlifts.com

- Architectural design assistance directly with you
- Architectural assistance to determine materials
- On site visit / feedback from you

Contact our Design Team and transform your building at

Services & Tools Design your Lift



Design your Lift

Create and view in real time, the look and feel of the elevator just the way you want it to be incorporated into your concept design, with KLEEMANN Design your Lift.

KLEEMANN Design your Lift is an innovative tool that brings your designs to life with 3D modeling. Combine materials making your selection from a wide range of options such as walls, ceilings and floors. View your creation and share or download it, quickly and effortlessly!

Design your Lift in 3 easy steps

Step 1 Enter www.designyourlift.com Step 2 Select materials & accessories **Step 3** Print or e-mail

your customized cabin



Free your imagination and realize your vision.



Connect to Design your Lift

DESIGN YOUR LIFT

O Recei design da Departura



9.9

Services & Tools After Sales Service




KLEEMANN After Sales Service

To ensure that designing, ordering, receiving and maintaining products is as stress-free and effortless as possible, KLEEMANN provides dedicated service teams that offer additional support and guidance at every stage.

- 24/7 support in 9 languages
- Detailed technical manuals & illustrations
- Lift Tester app to test performance on site
- KLEEMANN Live system
- KLEEMANN E-shop for 24/7 spare parts orders
- Network of local spare parts warehouses on strategic map locations

- Quick & efficient delivery system
- Field visit available upon request
- Service team available to support 1st KLEEMANN installation on site
- Troubleshooting webinars

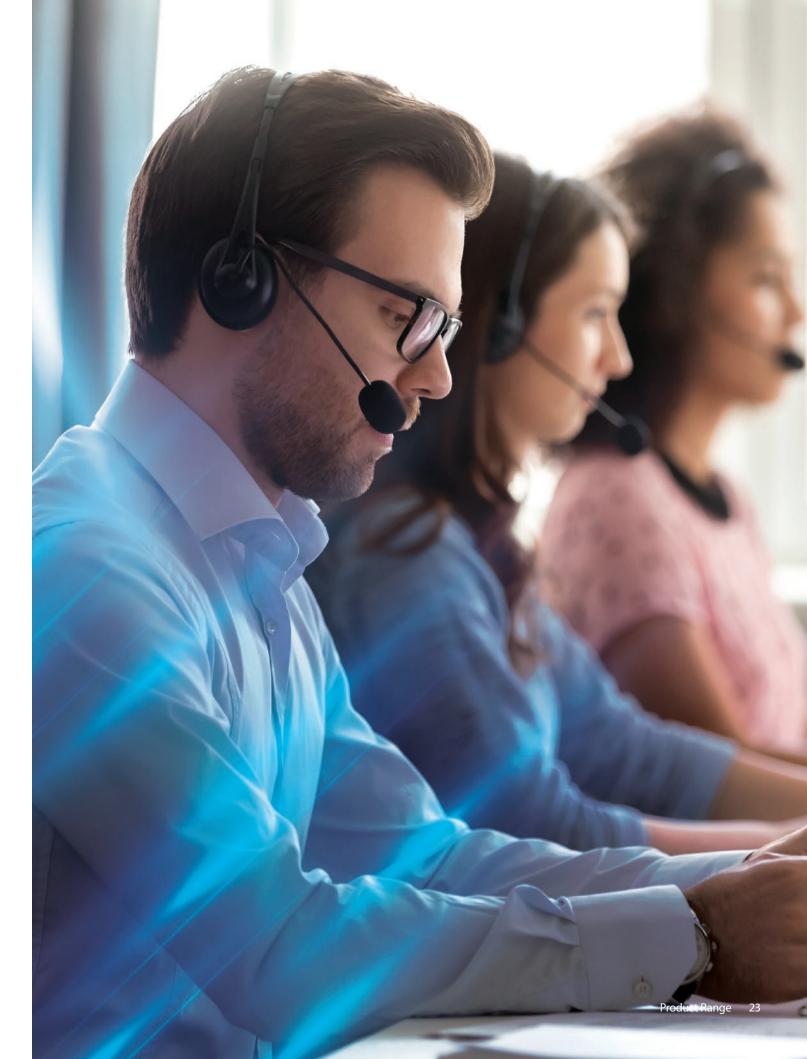





Features & Upgrades

KLEEMANN Live Green lifts Hygiene Line Anti – Vandal Earthquake Resistant Destination Control System Firefighting



KLEEMANN Live

KLEEMANN Live is an IoT system that collects, transmits, analyzes data and provides insights for lifts in real time. It keeps you linked 24/7 so you can have access to the lifts' status remotely any time, offering peace of mind to customers.

All needed is

- A new or existing installation with GENIUS20 control panel
- The plug & play hardware (gateway–autodialer)
- SIM card with data for cloud connection and minutes for autodialer calls
- To visit live.kleemannlifts.com using your KLEEMANN credentials



Easy remote check

• See the live status of all connected lifts

- Check messages
- Inspect rides & statistics

SAVE TIME & MONEY

up to 30% expenses

Benefits

Mobile

& Tablet Apps

......

App Store

0

20040

20400

1010

Google Play


Reduce the duration of visits to the site

GROW YOUR BUSINESS

of technicians Reduce the number of call outs by 20%

POWER UP YOUR PERFORMANCE

Extend equipment lifetime

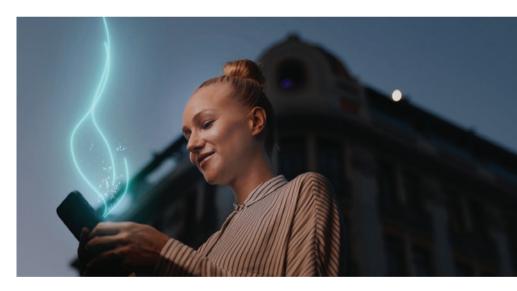

LIFT CONTROL

For facility managers:

- Monitoring elevators
- Remote call elevators
- Ticketing system for support
- Calendar with events
- Documents management

- Edit parameters if needed
- And all these from your laptop or smart device

- Reduce the number of scheduled maintenance visits save

- Expand and support more contracts with the same number

- Reduce down-time from unexpected problems up to 10%

LIFT CONTROL PRO

For elevator technicians:

Download the app, connect and control all your lifts. A userfriendly application that allows you to remotely keep track of the majority of KLEEMANN Live functions.

Upgrades Green lifts

CLASS

Green lifts


KLEEMANN believes in sustainable development and actively safeguards the right of future generations to inherit a safe, healthy and prosperous environment.


Leveraging on innovative methods from engineering to production, KLEEMANN provides Green lifts that feature a range of eco-friendly options.

At our production processes

87,54%

of total electricity consumed in 2022 in our facilities, came from Renewable Energy Sources (RES).



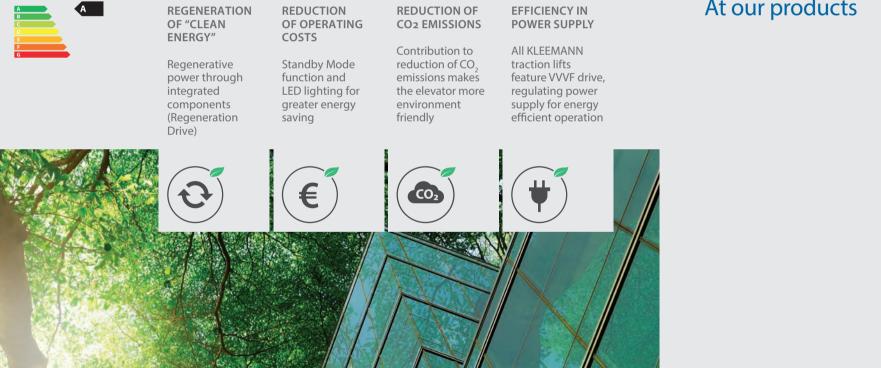

At our products

75%

More than 75% of the waste from the installation of a KLEEMANN elevator is recyclable.



Available upon request

- Lift energy efficiency studies according to VDI 4707-1 & ISO 25745-2
- Application of environmental assessment methods for energy analysis BREEAM (UK) / LEED v4 (US)

CERTIFIED EMS (ENVIRONMENTAL MANAGEMENT SYSTEM) ACCORDING TO

ISO 14001

Covers the production unit in the industrial area of Kilkis (office, facilities & factories).

ECO-DESIGN PRODUCTS ACCORDING TO

ISO 14006

KLEEMANN provides Environmental Fact Sheets for Atlas Basic, Atlas Gigas R, Atlas RPH R (for 450kg and 630kg), FlexyLift R, Maison100 E, HRS MR and Purity cabins.

Regular assessment on products' full life cycle

Achievement of eco-optimized product design

- Less raw materials
- Less paints
- Less cables

Upgrades Hygiene line



Hygiene line

Cabin hygiene has always been a key challenge in lift engineering and design. KLEEMANN presents an innovative series of solutions for safer cabin environment and extra protection for passengers at all times.

Air Purifier

A solution for pure uncontaminated air in the cabin, clean of bacteria & viruses



Touchless buttons

An 100% antibacterial solution that operates by infrared induction which detects the call's activation



Anti-Bacterial buttons

Blue Line KLH-42R buttons with nano-silver coating, that can provide antibacterial and antifungal protection







Upgrades Anti-vandal



Anti-vandal (EN 81-71)

Anti-Vandal lifts withstand heavy use and abuse, thanks to vandalism resistant materials. Ideal solution for busy public spaces.

How to

Advantages

- Designed according to EN 81.71
- Reduced number of incidents and costs of damage repairs
- Robust and of high technology for exceptional ride quality

To help eliminate any damage caused to lifts in unsupervised settings, we offer a complete product which adheres to Cat 1 and Cat 2 of EN 81-71. For more info go to: **Product Features Anti-Vandal Lifts** KLEEMANN (kleemannlifts.com

Upgrades Destination Control System



Destination **Control System**

The Destination Control System increases efficiency in lift operation and exceedingly reduces waiting times in buildings with high traffic density

Advantages

- Passenger comfort
- Energy saving / Cost reduction
- Flexible configuration
- High efficiency and safety

Upgrades Earthquake Resistant



Earthquake Resistant lifts (EN 81-77)

KLEEMANN is the first in Europe to exclusively introduce a system that turns any hydraulic or traction lift to earthquake resistant

Advantages

- Seismic sensor for seismic waves For more information check: detection
- Passenger notification automation
- Special armoring in vital parts
- In compliance with EN 81-77 or ASME A17.1
- Option for upgrading lifts by partial installation
- Smooth operation and reliability

Upgrades Firefighting



Firefighting (EN 81-72)

Firefighting elevators allow firefighters to rescue passengers who may be trapped on upper floors during an event of emergency in a building

Advantages

- Trap doors and ladders for rescue operations
- Splashing water protection for electrical components in shaft and on car
- Operation according to EN 81-72

How to

https://www.youtube.com/ watch?v=S_dcUw5-E6c

Product Features Earthquake Resistant | KLEEMANN (kleemannlifts.com



How to

Find out everything about DCS at **Product Features Destination** Control System | KLEEMANN (kleemannlifts.com

How to

Find out about firefighting elevators (EN 81-72) at Product Features Firefighting **KLEEMANN** (kleemannlifts.com



Passenger lifts

FlexyLIFT R Atlas Basic Atlas RPH R



Products **Elevators**

Homelifts

Maison100 E Maison100 H Maison200 H

Freight lifts

Hydraulic Atlas Super Gigas

Atlas Gigas R HRS

Elevators Passenger lifts FlexyLIFT R

Passenger **FlexyLIFT R**

A versatile hydraulic lift solution that can fit buildings with limitations in shaft dimensions and machine room position

Type of lift > Hydraulic



Technical specifications

| Model | FlexyLIFT R |
|-----------------------|----------------------------|
| Rated load (Kg) | 180-1000 |
| Suspension | 1:2 |
| Machine room | MR |
| Max travel (m) | 25 |
| Max number of stops | 8 |
| Max speed (m/s) | 0,74 |
| Min pit depth (mm) | 300 |
| Min headroom (mm) | 2600 |
| Maximum car entrances | 3 |
| Complies with | Lifts Directive 2014/33/EU |



Extra features & upgrades

KLEEMANN LIVE





EARTHQUAKE RESISTANT (EN 81-77)



Recommended uses

Residential


Description & features

a machine room.

Minimum requirements

Offering a rated load capability of 180–1000kg, almost no pit depth requirements and a minimum headroom of 2600mm, FlexyLIFT R is the perfect hydraulic solution for lift modernization in low and mid-rise buildings.



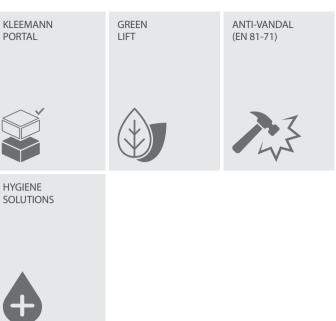

FlexyLIFT R is a cost-effective, eco-friendly and versatile lift solution that can be adapted to fit specific shaft dimensions and machine room requirements. It is ideal for existing or new residential buildings that have pit and headroom limitations. The small cabinet option for the power unit and controller, enables installation in shafts with or without

Outstanding ride quality

FlexyLIFT R is designed to deliver both premium quality construction and exceptional ride comfort. Low noise levels and minimal vibrations ensure a smooth and pleasant passenger experience.

Elevators Passenger lifts Atlas Basic

Passenger **Atlas Basic**

The cost-effective traction solution for rated loads up to 1050kg, ideal for mid-rise buildings

Type of lift > Traction



Technical specifications

| Model | Atlas Basic |
|-----------------------|--|
| Rated load (Kg) | 375-1000 |
| Suspension | 2:1 |
| Machine room | Machine Room-Less (MR as an option) |
| Max travel (m) | 65 |
| Max number of stops | 24 |
| Max speed (m/s) | 1,6 |
| Min pit depth (mm) | 1100 |
| Min headroom (mm) | 3400 |
| Maximum car entrances | 2 |
| Complies with | Lifts Directive 2014/33/EU |



Extra features & upgrades

Recommended

Commercial & Public

uses

Residential

KLEEMANN LIVE





FIREFIGHTING (EN 81-72)



Description & features

Atlas Basic is a highly economical traction MRL solution for residential buildings. Serving rated loads of 375–1000kg, it is designed to offer both reduced total cost of ownership (TCO) and value for money.

Minimizing sound & costs

With premium quality gearless motor and speeds of up to 1.6m/s, it is equipped with a state-of-theart inverter that minimises sound, ensures ride quality and a very low energy consumption.

Low noise levels

Remarkably low noise levels inside and outside the cabin. The noise level inside the cabin (measured according to ISO 18738) during the lift operation reaches 52-54 dB.





Emergency evacuation

In the event of power failure, the emergency evacuation system ensures safe transportation of passengers to the nearest floor where doors automatically open to allow car exit.

Elevators Passenger lifts Atlas RPH R

Passenger Atlas RPH R

A highly practical solution for buildings with pit and headroom limitations, also recommended for existing buildings

Type of lift > Traction



Technical specifications

| Model | Atlas RPH R |
|-----------------------|----------------------------|
| Rated load (Kg) | 450-1050 |
| Suspension | 2:1 |
| Machine room | Machine Room-Less |
| Max travel (m) | 40 |
| Max number of stops | 14 |
| Max speed (m/s) | 1,0 |
| Min pit depth (mm) | 320 |
| Min headroom (mm) | 2600 |
| Maximum car entrances | 3 |
| Complies with | Lifts Directive 2014/33/EU |



Extra features & upgrades

KLEEMANN LIVE

PORTAL



FIREFIGHTING (EN 81-72)



Recommended uses

Residential Commercial & Public

Description & features

gearless motor and speeds of up to 1m/s.


Ease of installation

Atlas RPH R needs only for the installation with of the subunits pre-asse and ready to be installed

Advanced inverter

The state-of-the-art inverter minimises noise and delivers outstanding ride quality and exceptionally low energy consumption. Ideal for the modernization of existing lifts and those with narrow shafts, Atlas RPH R complies with Lifts Directive 2014/33/EC and standards EN81-20 and EN81-21.



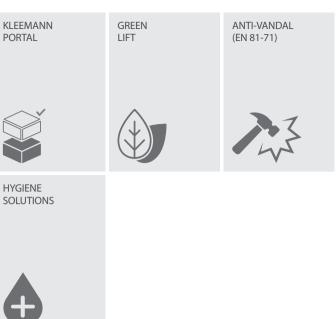

Atlas RPH R provides a practical traction MRL solution for residential buildings with pit and headroom limitations. Suitable for rated loads up to 1050kg, Atlas RPH R features KLEEMANN's premium quality

Spatial efficiency

| one wall | Suitable for buildings with |
|----------|-----------------------------------|
| most | reduced pit and headroom, Atlas |
| embled | RPH R is ideal for modernization |
| ed. | of existing lifts. Designed to |
| | support the installation of up to |
| | three cabin doors. |
| | |

Elevators Passenger lifts Atlas Gigas R

Passenger Atlas Gigas R

The ideal option for rated loads up to 2500kg and for high density passenger flow buildings with minimum waiting times

Type of lift > Traction



Technical specifications

| Model | Atlas Gigas R |
|-----------------------|--|
| Rated load (Kg) | 1150-2500 |
| Suspension | 2:1 |
| Machine room | Machine Room-Less (MR as an option) |
| Max travel (m) | 45 |
| Max number of stops | 16 |
| Max speed (m/s) | 1,6 |
| Min pit depth (mm) | 1100 |
| Min headroom (mm) | 3800 |
| Maximum car entrances | 2 |
| Complies with | Lifts Directive 2014/33/EU |



Extra features & upgrades

KLEEMANN LIVE

PORTAL



EARTHQUAKE RESISTANT (EN 81-77)



Recommended uses

Commercial & Public Hotel Hospital Industrial

Description & features

Stopping accuracy

Due to its gearless motor and state-of-the-art inverter, Atlas Gigas R offers excellent stopping accuracy that does not exceed 2mm while the ride quality exceeds all quality standards (measurements based on ISO 18738).

Spatial efficiency

Optimum space efficiency is granted for high density passenger flow provided by the capability for larger car installation in a standard shaft.





Atlas Gigas R is an ideal traction solution for a range of rated loads of 1050–2500kg and up to 1,6m/sec. Offering the option to install a larger car in a standardized shaft, Atlas Gigas R provides optimum space efficiency for buildings with high density passenger flow.

Machine lifting system

Atlas Gigas R is supplied with a machine lifting system, especially designed to facilitate the installation of high rated load lifts, hence, larger motors.

Elevators Passenger lifts HRS

Passenger HRS

A high-speed solution for big buildings with high density passenger flow

Type of lift > Traction





Technical specifications

| Model | HRS (MRL) | HRS (MR) |
|--------------------------|----------------------------|----------------------------|
| Rated load (Kg) | 630-1275 | 1000-1600 |
| Suspension | 2:1 | 2:1 |
| Machine room | Machine Room-Less | Machine Room |
| Max travel (m) | 150 | 150 |
| Max number of stops | 47 | 47 |
| Max speed (m/s) | 2,5 | 4,0 |
| Min pit depth (mm) | 1800 | 1800 |
| Min headroom (mm) | 4450 | 4140 |
| Maximum car entrances | 2 | 2 |
| Complies with | Lifts Directive 2014/33/EU | Lifts Directive 2014/33/EU |

Extra features & upgrades

KLEEMANN LIVE





HYGIENE SOLUTIONS



Recommended uses

Commercial & Public Hotel

Description & features

Premium ride quality

The isolated roller guide shoes limit vibrations and offer premium ride quality and cost saving. Exceptionally long service life for rollers due to the spring system and the permanent contact with the guide rail.

Reduced waiting times

The Destination Control System reduces waiting times by serving the increased number of calls, where it is important for the passengers to be transported rapidly.





EARTHQUAKE RESISTANT (EN 81-77)

FIREFIGHTING (EN 81-72)



DESTINATION CONTROL SYSTEM





The high-speed HRS KLEEMANN Lift delivers outstanding ride quality and innovative Remote Lift Monitoring System. Destination Control ensures reduced waiting times and smooth passenger experience.

Remote Lift Monitoring System

Providing the opportunity for improved lift management, the Remote Lift Monitoring System is an excellent solution for buildings with multiple lifts enabling the efficient and simultaneous management of up to18 lifts.



Homelift Maison100 E


The innovative electric cabin platform lift, with premium design, that makes best use of available space and is extremely energy efficient

Type of lift > Electric



Technical specifications

| Model | Maison100 E |
|-----------------------|--------------------------------|
| Rated load (Kg) | Up to 400 |
| Max travel (m) | 12 |
| Max number of stops | 5 |
| Max speed (m/s) | 0,15 |
| Pit depth (mm) | 100 |
| Headroom (mm) | 2500 |
| Maximum car entrances | 2 |
| Complies with | Machinery Directive 2006/42/EC |

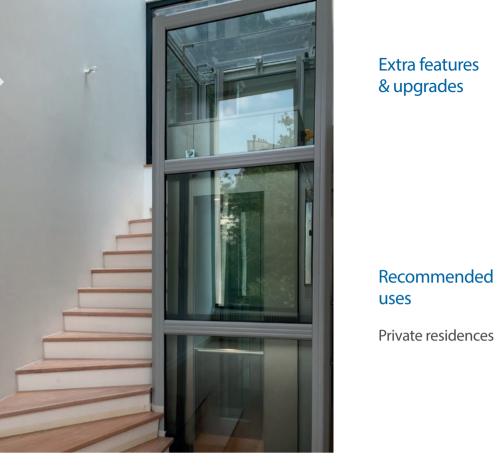

Extra features & upgrades

KLEEMANN LIVE



Description & features

Acknowledging the importance of space availability, KLEEMANN introduces Maison100 E, with 100mm minimum pit depth and 2500mm headroom required. Available with semi-automatic or automatic doors, Maison100 E can be also provided with an aluminum shaft construction where a masonry shaft is not available.


Premium Design

Cabin's special design er ease of installation while RGB colours' lighting cre outstanding ambience.

Plug n' play solution

Prewired shaft wiring an phase power supply.





Fast and easy installation

| ensures le the eates an | Smart and compact design for installation in just 3 days. |
|-------------------------------|---|
| • | |
| | Low noise levels |

| nd single- | Innovative electric drive |
|------------|--------------------------------|
| | (VVVF controlled) guarantees |
| | remarkably low noise levels in |
| | and out of the cabin. |



Homelift Maison100 H

Safety and style with this value for money hydraulic home lift solution, with minimum space requirements

Type of lift > Hydraulic



Technical specifications

| Model | Maison100 H |
|-----------------------|--------------------------------|
| Rated load (Kg) | Up to 385 |
| Max travel (m) | 12 |
| Max number of stops | 5 |
| Max speed (m/s) | 0,15 |
| Pit depth (mm) | 100 |
| Headroom (mm) | 2400 |
| Maximum car entrances | 2 |
| Complies with | Machinery Directive 2006/42/EC |

Extra features & upgrades

Recommended

Private residences

uses

KLEEMANN LIVE

PORTAL



Description & features

Ideal for comfort and ease, Maison100 H, is designed and manufactured according to Machinery Directive 2006/42/EC and meets any need for transportation and mobility. A value for money solution that provides access inside or outside a multi-storey private residence and guarantees safety and style.

Value for money

Its very low energy cons (lower than a kitchen ov conjunction with its cab makes Maison100 H the value for money choice. 100mm minimum pit de 2400mm headroom reg is perfectly suitable for k with or without concret and with shaft pit and h limitations.

Plug n' play solution

Prewired shaft wiring an phase power supply.



KLEEMANN



Optimum use of space

| sumption ven) in oin design, e ideal With lepth and quired, it buildings te shaft neadroom | The pit and headroom requirements are amongst the most competitive in the market for enclosed cabin platform lifts. Maison100 H for Home Solutions offers optimum space efficiency by providing the opportunity of installing larger car in a standard shaft. |
|---|---|
| | Premium ride quality |
| nd single- | Maison100 H offers a premium ride quality, with the new controller Genius20, with tape head system for precise floor levelling and a 2-speed hydraulic valve. |



Homelift Maison200 H

A hydraulic homelift solution that offers a wide range of design options for a personalized experience

Type of lift > Hydraulic



Technical specifications

| Model | Maison200 H |
|-----------------------|--|
| Rated load (Kg) | Up to 630 |
| Max travel (m) | 12 |
| Max number of stops | 6 |
| Max speed (m/s) | 0,15* - 0,3** |
| Pit depth (mm) | 100* - 150** |
| Headroom (mm) | 2450* - 2600** |
| Maximum car entrances | 2 |
| Power supply | Single phase or three phase |
| Complies with | * Machinery Directive 2006/42/EC ** AS1735.18 |

Extra features & upgrades

KLEEMANN LIVE

PORTAL



Recommended

Private residences

uses

Description & features

Maison200 H is a hydraulic solution that offers an efficient use of space and can be easily adapted to any architectural need and design, even for special and challenging projects. Elegant and convenient allows the perfect fitting in any building, existing or new. Maison200 H guarantees outstanding ride quality and a wide selection of design options and finishes to meet your aesthetic needs.

Efficient use of space

Maison200 H maximizes efficient use of space. Ev the dimensions of the sh remain the same, Maisor can accommodate a larg maximizing the usable s

Premium ride quality

Maison200 H features p construction quality, low levels and minimal vibra This ensures a smooth a comfortable ride for page enhancing the overall e



KLEEMANN



| s the |
|-----------|
| en though |
| naft |
| n200 H |
| ger car, |
| space. |
| |

Customizable design options

Maison200 H offers a wide range of cabin types and interior materials. Whether you prefer a sleek and modern look or a more traditional aesthetic, Maison200 H can be tailored to suit your desired ambiance.

Aluminum shaft option

| oremium | In situations where a concrete |
|--------------------------|-------------------------------------|
| w noise | shaft is not available or feasible, |
| rations. | the Maison200 H offers an |
| and | aluminum construction option. |
| ssengers, experience. | |

Elevators Freight lifts Hydraulic

Freight Hydraulic

A powerful hydraulic solution for freight transportation up to 10.000kg

Type of lift > Hydraulic

Technical specifications

| Model | Hydraulic Freight |
|-----------------------|---------------------------------|
| Rated load (Kg) | 1050-10000 |
| Suspension | 1:1 , 2:1 |
| Machine room | Yes |
| Max travel (m) | 26 |
| Max number of stops | 9 |
| Max speed (m/s) | 0,5 (depending on the max load) |
| Min pit depth (mm) | 1000 |
| Min headroom (mm) | 3450 |
| Maximum car entrances | 2 |
| Complies with | Lifts Directive 2014/33/EU |

Extra features & upgrades

Recommended

uses

Industrial

Car Lift

Hospital

Commercial

KLEEMANN LIVE



HYGIENE SOLUTIONS




Description & features

KLEEMANN hydraulic freight lifts combine maximum durability and high operating reliability. Their flexible design and manufacturing process provide them with the unique capability to be customized according to the building's requirements. They can handle any load up to 10.000kg which makes them the perfect solution for applications in industrial buildings, plants, warehouses, super markets etc.

Safety features

It is equipped with light curtains Equipped with heavy duty types to provide additional safety and of doors and sill tracks, cabin and overload detection. protective bumber rails for extra robustness.





Robust construction

Elevators Freight lifts Atlas Super Gigas

Freight **Atlas Super Gigas**

Robust and reliable traction solution for freight transportation up to 5.000kg, designed to fully exploit shaft space

Type of lift > Traction



Technical specifications

| Model | Atlas Super Gigas |
|-----------------------|----------------------------|
| Rated load (Kg) | 2500-5000 |
| Suspension | 4:1 |
| Machine room | Machine Room-Less |
| Max travel (m) | 45 |
| Max number of stops | 16 |
| Max speed (m/s) | 1 |
| Min pit depth (mm) | 1400 |
| Min headroom (mm) | 3900 |
| Maximum car entrances | 2 |
| Complies with | Lifts Directive 2014/33/EU |

Extra features & upgrades

Recommended

uses

Industrial

Car Lift

Hospital

Commercial

KLEEMANN LIVE



HYGIENE SOLUTIONS



Description & features


Safe door closing

Atlas Super Gigas is equ with light curtains to proadditional safety and pr when the car doors are

Outstanding ride quali

Premium quality and exceptional ride comfort are delivered by both a gearless motor and a state-ofthe-art inverter.





Atlas Super Gigas is the optimum solution for freight transportation of rated loads up to 5.000kg. Equipped with KLEEMANN's premium guality gearless motor and state-of-the-art inverter, it presents excellent performance, ride quality and a low energy consumption. Fully exploiting the shaft space, it features tailored cargo lift struts.

Spatial efficiency

| closing. ty | rated loads up to 5.000kg. Stopping accuracy |
|-----------------------|--|
| iipped | Optimum space efficiency by |
| ovide | offering the option of a larger car |
| rotection | installation in a standard shaft for |

Excellent stopping accuracy less than 2mm, while the ride quality exceeds all quality standards (based on ISO 18738).

Elevators Comparative technical chart

Comparative technical chart

| | Passenger lifts | | | | | |
|--------------------------|-------------------------------|--|--|---|---|--|
| Model | FlexyLIFT R | Atlas RPH R | Atlas Basic | Atlas Gigas R | HR | S |
| Туре | Hydraulic | Traction | Traction | Traction | Tracti | on |
| Rated Load (Kg) | 180-1000 | 450-1050 | 375-1000 | 1150-2500 | 630-1275 | 1000-1600 |
| Suspension | 1:2 | 2:1 | 2:1 | 2:1 | 2:1 | 2:1 |
| Machine Room | MR | MRL | MRL | MRL | MRL | MR |
| Max Travel (m) | 25 | 40 | 65 | 45 | 150 | 150 |
| Max Number of Stops | 8 | 14 | 24 | 16 | 47 | 47 |
| Max Speed (m/s) | 0,74 | 1,0 | 1,6 | 1,6 | 2,5 | 4,0 |
| Min Pit Depth (mm) | 300 | 320 | 1100 | 1100 | v=2,0 m/s 1800 v=2,5 m/s 1950 | v=2,0 m/s 1800 v=2,5 m/s 1950 v=3,0 m/s 1950 v=4,0 m/s 3800 |
| Min Headroom (mm) | 2600 | 2600 | 3400 | 3800 | v=2,0 m/s 4450 (630-1000kg) v=2,0 m/s 4500 (1275kg) v=2,5 m/s 4700 (630-800kg) v=2,5 m/s 4750 (1000-1275kg) | v=2,0 m/s 4140 v=2,5 m/s 4380 v=3,0 m/s 4470 v=4,0 m/s 4680 |
| Maximum Car Entrances | 3 | 3 | 2 | 2 | 2 | 2 |
| Main standard | EN81-20 & EN81-21 | EN81-20 & EN81-21 | EN81-20 | EN81-20 | EN81-20 | EN81-20 |
| Complies with | Lifts Directive 2014/33/EU | Lifts Directive 2014/33/EU | Lifts Directive 2014/33/EU | Lifts Directive 2014/33/EU | Lifts Directive 2014/33/ EU | Lifts Directive 2014/33/EU |
| Recommended use | Residential | Residential, Commercial & Public | Residential, Commercial & Public | Commercial & Public, Industrial, Hotel, Hospital | Commercial & F | Public, Hotel |

| Homelifts | | | |
|------------------------------------|------------------------------------|---|--|
| Maison100 H | Maison100 E | Maison200 H | |
| Hydraulic | Electric | Hydraulic | |
| Up to 400 | Up to 385 | Up to 630 | |
| 1:2 | 6:1 | 1:2 | |
| MRL (with machinery cabinet) | MR | MRL | |
| 12 | 12 | 12 | |
| 5 | 5 | 6 | |
| 0,15 | 0,15 | 0,15 - 0,3 | |
| 100 | 100 | 100*- 150 | |
| 2400 | 2500 | 2450 - 2600 | |
| 2 | 2 | 2 | |
| | | | |
| Machinery Directive 2006/42/ EC | Machinery Directive 2006/42/ EC | * Machinery Directive 2006/ ** AS1735.18 | |
| Private residence | Private residence | Private residence | |

Freight lifts

Hydraulic Freight Atlas Super Gigas Hydraulic Traction 2500-5000 1050-10000 1:1 , 1:2 4:1 MR Machine Room-Less 24 45 9 16 0,74 1 1000 1400 3450 3900 2 2 EN81-20 EN81-20 5/42/EC Lifts Directive 2014/33/EU Lifts Directive 2014/33/EU Industrial Industrial Car Lift Car Lift Hospital Hospital Commercial Commercial






Products Modernization Solutions

Moderization Solutions


Modernization Solutions

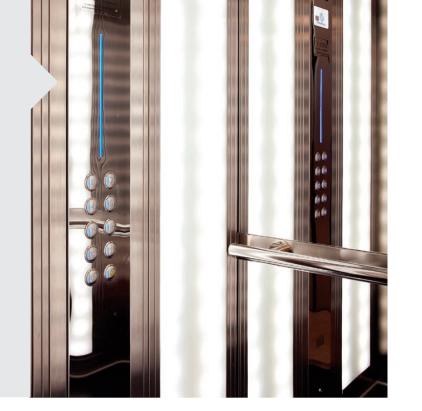

Customized, reliable and compatible modernization solutions from full replacement or partial modernization, to components' replacement and special applications, that upgrade the user experience, effecting both the aesthetic and the mechanical part of elevators

Choose from a wide range of options and find those that match your requirements

- Machine (geared / gearless)
- Controller Genius20 (many options for cabinet)
- Sling (hydro / traction / counterweight)
- Cabin
- Doors
- Piston / power unit
- Shaft material (ropes, guide rails, encoder, oil cooler etc)









KLEEMANN MOD Kits provide you with solutions that meet all standards and safety requirements

Safety kit

Safety kit ensures the sa operation of the lift for passengers and technic (includes safety gear, ov governor, emergency a

Eco friendly kit

Eco friendly kit ensures ride quality and energy consumption for tractic (includes gearless mach lights, halogen free wiri hydraulic lifts (hydro VV

Aesthetics kit

Upgrade the design of y choosing from a wide ra of cabins, car and landin operating panels.

Hygiene kit

Choose from a complet of hygiene products (to or antibacterial buttons purifier, handrail steriliz to enhance the passeng health inside the lift and moving walk.



A3 kit

| afe both cians verspeed auto dialer). | Unintended car movement can be prevented with the installation of A3 kits (includes overspeed governor, controller, machine gearless or geared with slow shaft brake, bidirectional safety gears). |
|---|---|
| excellent | EN81-21 kit |
| / on hine, LED ing) and /VF). | EN81-21 kit ensures that the existing lift obtains same safety level with a new one (includes, extra locking device, apron, base and maintenance beam low pit, split balustrade, controller). |
| your lift by | EN81-20 kit |
| range ng | Upgrade the existing lift to recent European standards EN 81.20 to enhance safety for both passengers and lift technicians. |
| te series | EN81-72 kit |
| ouchless s, cabin air zers) gers' ad on the | Upgrade and modify the existing lifts under EN 81.72 European norm, for Fire Services use. |






Products Accessibility solutions

FreeSTAIR with seat FreeSTAIR for wheelchair Accessibility solutions FreeSTAIR with seat

FreeSTAIR with seat

Systems with seat that can be custom fit to match any need and improve mobility both indoors and outdoors

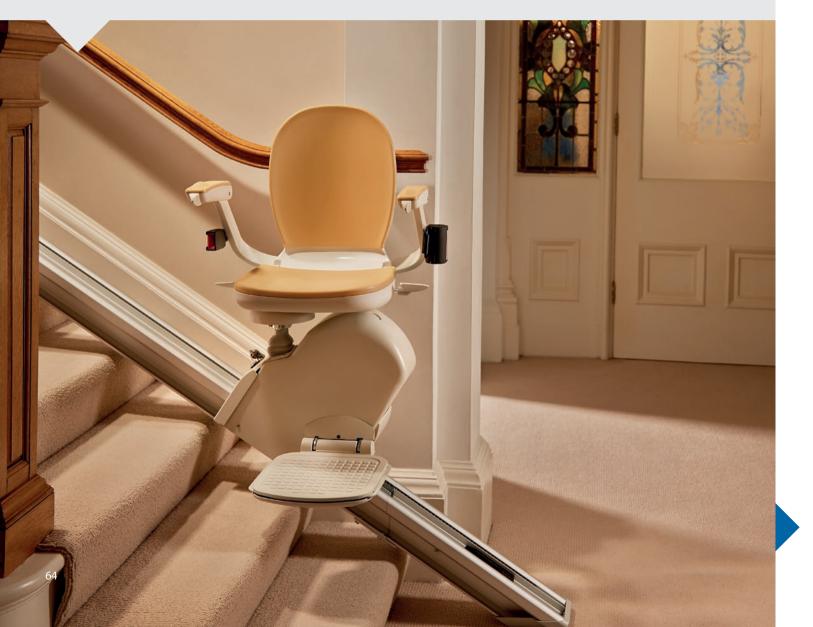

Technical specifications

| Model | KSL 200 | A 130 |
|-------------------------------|--------------------------|--------------------------|
| Туре | Straight / Circular | Straight |
| Rated Load (kg) | 130 | 127 |
| Installation | Indoors / Outdoors | Indoors / Outdo |
| Max Travel- stops | 4 Stops | 2 Stops |
| Max speed (m/s) | 0,1 | 0,1 |
| Inclination (degrees) | 0-70 | 27-55 |
| Power Supply | Rechargable batteries | Rechargable batteries |
| Required staircase width (mm) | 900 | 800 |
| Motor Power | 24V DC / 0,35Kw | 24V DC / 0,25Kv |

Extra features

Description & features

Recommended uses

Indoor and outdoor staircases

| | A180 | Alpha |
|-------|--------------------------|--------------------------|
| | Straight / Circular | Straight / Circular |
| | 120 | 130 (optional 145) |
| doors | Indoors | Indoors / Outdoors |
| | 4 Stops | 4 Stops |
| | 0,1 | 0,1 |
| | 0-58 | 0-52 |
| | Rechargable batteries | Rechargable batteries |
| | 900 | 900 |
| Św | 24V DC / 0,375Kw | 24V DC / 0,5Kw |

Indoor or outdoor installation
Designed for maximum safety and comfort
Remote control with 'hold to run' buttons
Variety of seat and metal structure colours

KLEEMANN FreeSTAIR systems with seat, have been specially designed to help users of all ages who have difficulty climbing stairs. The systems are custom-made for each individual application, so they can be fitted to any indoor or outdoor staircase and in houses with both straight and curved staircases. They are available in a number of different models, providing solutions to meet the needs of any user.

FreeSTAIR for wheelchair

Elevating systems for wheelchairs offering autonomy, safety and comfort to users, ideal for public and private spaces



Technical specifications

| Model | T100 Platform | T80 Platform | Delta | Stratos | V6 |
|--------------------------|---|---|---|---|--|
| Rated load (kg) | 300 | 300 | 300 | 300 | 250 if the slope is more than 450 |
| Installation | Indoors/Outdoors | Indoors/Outdoors | Indoors/Outdoors | Indoors/Outdoors | Indoors/Outdoors |
| Inclination (degrees) | 15-45 | 0-60 | 0 - 52 | 45 | 0-50 |
| Platform sizes (mm) | 750*1000 or 800*1000 | 680*840, 700*900, 750*1000, 800*1000 | 700*750, 750*850, 800*900, 800*1000 | 700*750, 750*850, 800*900, 800*1000 | 750x600, 750x650, 750x700, 800x700 900x700, 1000x800 1000x900, 1250x800 |
| Colours | RAL 7047 / 8022 / 9002 / 9007 | RAL 7032 / 7047 / 8022 / 9002 / 9006 / 9007 | Platform: RAL 7035 Rail: RAL 9007 | Platform: RAL 9018 Rail: RAL 9005 | Platform: RAL 9018 Rail: RAL 9005 |
| Motor | 24V DC / 0,42kW | 24V DC / 0,42kW | 24V DC / 0,5kW | 24V DC / 0,5kW | 24V DC / 1kW |
| Speed | 0,08 m/sec | 0,15 m/sec | 0,12m/sec | 0,12m/sec | 0,10m/sec |
| Safety systems | Safety gear - "Hold to run" controls | Safety gear - "Hold to run" controls | Safety gear - "Hold to run" controls | Safety gear - "Hold to run" controls | Safety gear - "Hold to run" controls |
| Complies with | Machinery Directive 2006/42/EC EC Type Examination Certificate | Machinery Directive 2006/42/EC EC Declaration of Conformity |

Extra features

Description & features

Recommended uses



 Indoor or outdoor installation • Variety of metal structure colours • Seat adjustable to platform (optional) • Remote control with 'hold to run' buttons • EC Type Examination Certificate

KLEEMANN FreeSTAIR for wheelchairs systems, have been designed to enable wheelchair users to move with autonomy, safety and comfort, offering access to any building where the installation or use of a conventional lift is not possible. They can be installed in both indoor and outdoor spaces, and mounted either on the wall or on the floor. An ideal solution for both public and private spaces.

Public and private spaces





Products Escalators & Moving Walks

Escalators

KEC Commercial KEH Heavy Duty


Moving Walks

KTC Commercial KTH Commercial KTW Heavy duty

Escalators & moving walks

Escalators & Moving Walks

Varied solutions with custom-made design that offer exceptional ride quality, safety and energy efficiency

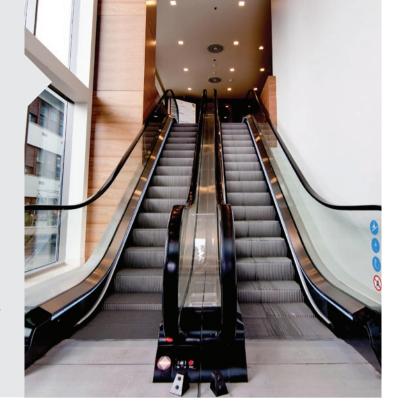

| Technical specifications | Moving Walk Model |
|-----------------------------------|---|
| | Working hours (per day) |
| | Capacity / hour (Theoretical value according to EN115- 1:2017, Annex H) |
| | Inclination |
| | Step Width (mm) |
| | Horizontal movement (mm) |
| - | Operating Speed (m/s) |
| | Vertical rise (m) |
| | Motor type |
| | Installation |
| Product description & features | KLEEMANN Escalators installations in hotels, l KLEEMANN offers unic or heavy- duty Escalate solutions for all project |
| Recommended uses | Public and commercia |
| Outstanding ride quality | Designed to ensure bo ride comfort. Low nois and comfortable passe requirements. |

Ease of installation and use, providing spatial efficiency and reliability.

Regeneration system to provide excellent ride quality while reducing energy usage by up to 60%. Many of the products' parts recyclable (steps, brush profile, glass panel clamps, etc).

Three sterilizer solutions for the Escalators' / Moving Walks' handrail, available to provide protection from bacteria and viruses.

Technical specifications



| Escalator Model | KEC Commercial | KEH Heavy Duty |
|--|-------------------------|-------------------------|
| Working hours (per day) | 16-20 | 20-24 |
| Capacity / hour (Theoretical value according το EN115-1:2017, Annex H) | Up to 6000 passengers | Up to 7300 passengers |
| Inclination | 30° / 35° | 30° / 35° |
| Step Width (mm) | 600 / 800 / 1000 | 600 / 800 / 1000 |
| Operating Speed (m/s) | 0,5 | 0,5 or 0,65 |
| Vertical rise (m) | 2-7,5 | 2-35 |
| Motor type | AC1 or VVVF | AC1 or VVVF |
| Installation | Indoor, outdoor, marine | Indoor, outdoor, marine |

| Outstanding ride quality | |
|-----------------------------|--|
| Ease of installation | |

Eco-friendly

Hygiene line




| KTC Commercial | KTH Commercial | KTW Heavy duty |
|-----------------------------------|-----------------------------------|-----------------------------------|
| 16-20 | 16-20 | 20-24 |
| Up to 6000 passengers | Up to 6000 passengers | Up to 6000 passengers |
| 10° / 11° / 12° | 10° / 11° / 12° | 0°-6°/10°/11° /12° |
| 800 / 1000 | 800 / 1000 | 1000 / 1200 / 1400 |
| 400 (at top) | 400 (at both landings) | |
| 0,5 | 0,5 | 0,5 |
| 2-8 | 2-8 | 0-8 (max length 120) |
| AC1 or VVVF | AC1 or VVVF | AC1 or VVVF |
| Indoor, semi- outdoor, outdoor | Indoor, semi- outdoor, outdoor | Indoor, semi- outdoor, outdoor |

lators & Moving Walks are the ideal solution for otels, hospitals, public and commercial buildings. rs unique, tailor-made design services for commercial scalators with a wide range of options and customized projects.

nercial buildings

ure both high quality construction and exceptional w noise levels and minimal vibrations provide a smooth passenger experience that will meet even the strictest

- Ultraviolet Lamp
- Sterile Touch
- UV Sterilizer

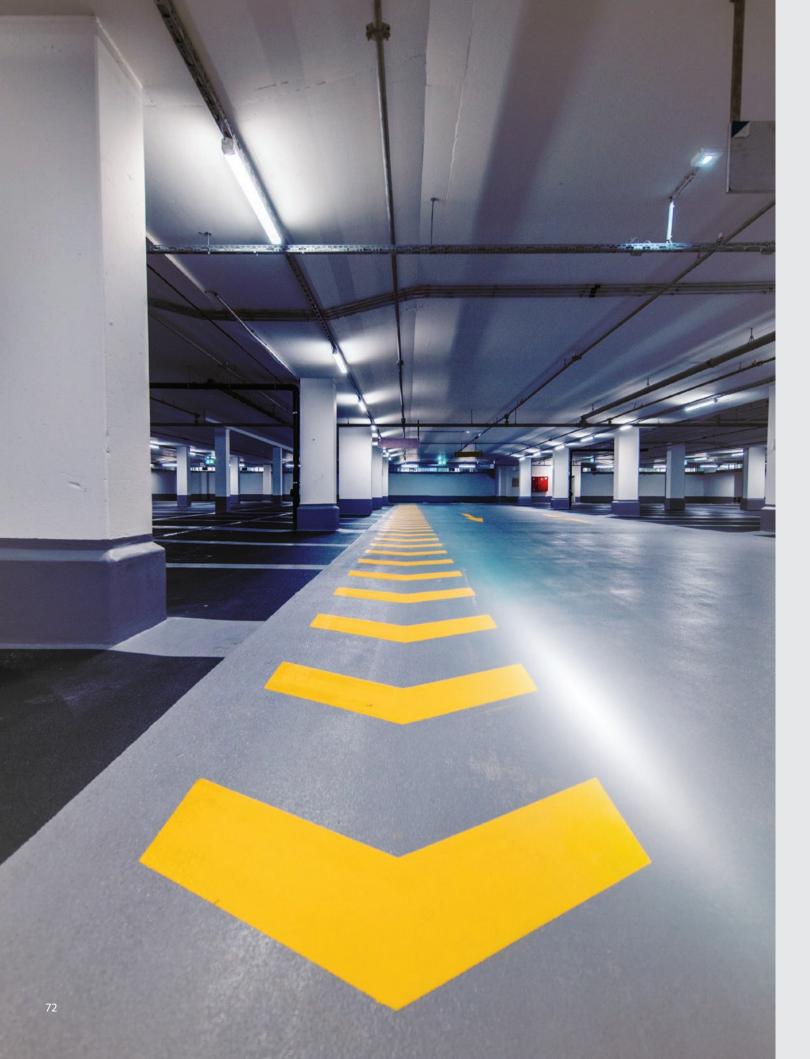

Car lifting systems KTS 2200 KTS 3000

Hydraulic Parking Systems UN_1+1 Hydro Park 1127 Hydro Park 1123 Hydro Park TPTP-2



Products Parking Systems

Vehicle Turntable Vehicle Turntable

Independent Parking systems UN_LPS UN_OPS Starke 2127 Starke 2227

Scissor lift platforms Single Scissor Platform Double Scissor Platform

Puzzle parking systems BDP-2 Parking **Systems**

Car Lifting Systems

Ideal solution for vertical transportation of vehicles where cement ramps or car lifts are not applicable



Scissor Lift Platforms

A simple and convenient solution to optimize parking space in areas with limited or restricted entrance

Technical specifications

| Model | KTS 2200 | KTS 3000 | |
|-----------------|--|----------------|--|
| Rated Load (kg) | 2200 | 3000 | |
| Max Travel (mm) | 12000 | 10000 | |
| Stops | max 4 | max 4 | |
| Platform (mm) | max 2440*5500 | max 2440*5500 | |
| Speed (m/sec) | max 0,15 | max 0,15 | |
| Pit depth (mm) | min 400 | min 500 | |
| Headroom (mm) | min 2700 | min 2700 | |
| Motor | 9,5Kw/380V/50Hz | 12Kw/380V/50Hz | |
| Pistons | KZAC 100*5 / KZAC 110*7,5 | KZAC 110*7,5 | |
| Tank | KLEEMANN T150 | KLEEMANN T250 | |
| Controller | KTS GL-1 | KTS GL-1 | |
| Block of valves | Blain KV1S | EV100 3/4 | |
| Landing doors | Roller shutters with 3-phase external motor | | |
| Complies with | Machinery Directive 2006/42/FC - FC type examination certificate | | |

| Technical | |
|----------------|--|
| specifications | |

| Model | Single Scissor Platform | Double Scissor Platform | | |
|-----------------|--|-------------------------|--|--|
| Rated Load (kg) | 3000 | 3000 | | |
| Max Travel | 4000 | 7400 | | |
| Stops | 2 | 3 | | |
| Platform (mm) | max 3000*6000 | max 3000*6000 | | |
| Speed (m/sec) | 0,05 - 0,08 | 0,05 - 0,08 | | |
| Pit depth (mm) | min 500 | min 600 | | |
| Headroom (mm) | min 2500 | min 2500 | | |
| Motor | 5,5Hp/380V/50Hz | 7,5Hp/380V/50Hz | | |
| Piston-Cylinder | 2 items 070-0120X135 | 2 items Ø80-Ø140X160 | | |
| Landing doors | Roller shutters with single-phase motor | | | |
| Complies with | Machinery Directive 2006/42/EC - EC type examination certificate | | | |

Complies with Machinery Directive 2006/42/EC - EC type examination certificate

Description & features

KTS Car Lifting System is designed for the vertical transportation of vehicles between two or more levels. In buildings where the construction of a cement ramp or a car lift is not possible, the KTS System provides the ideal solution for vertical transportation of up to a maximum of 12 meters.

Description & features



Single and double Scissor Lift Platforms provide a simple and convenient way to facilitate and optimize parking space. Suitable for underground, lower and upper parking levels, they are an ideal choice for parking areas where entrances and exits are restricted or limited. They offer up to 3 stops, an array of safety features and the choice of either 4000mm or 7400mm vertical travel.





Parking Systems

Vehicle Turntable

Economical and convenient parking solutions that make the best use of available space for effortless parking



Parking Systems

Hydraulic Parking Systems

Customizable solutions that provide additional independent space where multiple parking lots are required

Technical specifications

Model Min Pit Depth (mm) Pit diameter (mm) Motor type Rotation (degrees)

| Vehicle Turntable |
|--------------------------------------|
| 250 |
| 4600 |
| Hydraulic motor with slew ring drive |
| 360 |

Technical specifications

| Model | UN_1+1 | Hydro Park 1127 | Hydro Park 1123 | Hydro Park TPTP-2 |
|-----------------------|-------------------------------|----------------------------|-------------------------------|----------------------------|
| Rated Load (kg) | 2500 | 2700 | 2300 | 2000 |
| Lifting height | 2000mm | 2100mm | 2100mm | 1600mm |
| Usable platform width | 2060mm | 2100mm | 2100mm | 2100mm |
| Operation | Button Hold to Run | Key switch | Key switch | Key switch |
| Power Unit | - | 2,2Kw hydraulic power pump | 2,2Kw hydraulic power pump | 2,2Kw hydraulic power pump |
| Lifting/lowing time | - | <55s | <55s | <35s |
| Finishing | Powder coating/ galvanized | Powder coating | Powder coating | Powder coating |

Product description & features

Vehicle Turntables facilitate parking in spaces that pose limitations such as a single entrance and exit. They offer an economical and convenient parking solution, maximizing utilization of available space, generating smooth traffic flow and enabling effortless parking. Featuring 360° rotation, driven by a hydraulic motor with slew ring drive, a 4600mm pit diameter and 250mm minimum pit depth, they can be customized to accommodate any specific platform and dimension requirements.

Description & features

Installation of Hydraulic Car Parking Systems provides additional independent parking spaces for 2 vehicles. These systems can be customized to fix existing spaces and are an ideal solution when multiple parking spaces are required in new or existing buildings.







Parking **Systems**

Puzzle Parking Systems

Parking systems that provide a range of multi-storey solutions that enable independent parking of multiple cars



Parking **Systems**

Independent **Parking Systems**

Independent parking lift platforms that allow the parking of a vehicle without moving other cars

Technical specifications

| Model | BDP-2 |
|--------------------------|---------------------------------|
| Levels | 2 |
| Available car dimensions | 1850*5070*1550-2050mm |
| Rated Load (kg) | 2000-2500kg |
| Drive mode | Hydraulic cylinder + wipe ropes |
| Operation | Code, Card, Manual |
| Control | PLC centralized control system |
| Elevating speed | 8-12 m/min |
| Sliding speed | 7,5m/min |
| Power Supply | 3phase/380V/50-60Hz |
| Finishing | Powder coating |

Technical

specifications

| Model | UN_LPS | UN_OPS | Starke 2127 | Starke 2227 | |
|---------------------------------------|--|--|-------------------------------------|-------------------------------------|--|
| Vehicles parked per unit | 4 | 2 | 2 | 4 | |
| Rated capacity (kg) / Per Platform | 2500 | 2500 | 2700 | 2700 | |
| Available car length (mm) | 5000 | 5000 | 5000 | 5000 | |
| Available car width (mm) | 2050 | 2050 | 2050 | 2050 | |
| Available car height (mm) | 1700 | 1700 | 1700 | 1700 | |
| Waving plate | Galvanized steel sheet | Galvanized steel sheet | Galvanized steel sheet | Galvanized steel sheet | |
| Drive mode | Hydraulic cylinder and chains | Hydraulic cylinder and chains | Hydraulic cylinder and chains | Hydraulic cylinder and chains | |
| Operation | Button Hold to Run | Button Hold to Run | Keyswitch | Keyswitch | |
| Lifting speed | 30s | 30s | <55s | <55s | |
| Descending speed | 25s | 25s | <55s | <55s | |
| Finishing | Ral 7040 (can be galvanized for outside use) | Ral 7040 (can be galvanized for outside use) | Powder coating | Powder coating | |

Description & features



The selected parking space is moved to the desired position by means of an automatic control system and the parking spaces can be shifted vertically or horizontally. The systems integrate the latest advancements in stacking and sliding technology, maximizing the number of vehicles that can be accommodated in the available space.

Description & features



These independent parking lift platforms for 2 or 4 cars which are suitable for both commercial and residential purposes, allow the parking of a vehicle without moving any other car. The structure should be placed in a pit with certain dimensions and reinforced by fixing posts to walls.








Products Marine Solutions

Machine Roomless Solution (MRL) Machine Room Solution Marine Solutions

Marine Solutions

A wide range of expert solutions for vertical transportation of passengers and goods in private or commercial vessels

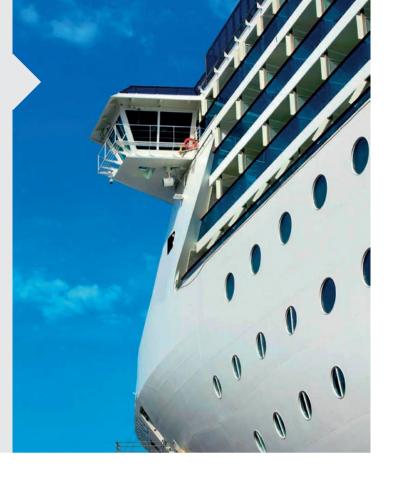

Standard Dimensions Crew Elevator (MR-Machine room Beside Trunk)

| Load Capacity (Persons) | Speed | Entrance Dimensions (mm) | Internal Car Dimensions (mm) | Trunk Dimensions (mm) ¹ | Pit Depth | Headroom Height ² |
|----------------------------|-------|-----------------------------|---------------------------------|---------------------------------------|-----------|---------------------------------|
| | | EWxEH | CWxCD | SWxSD | | |
| 300 kg (4 persons) | 1m/s | 800x2000 | 950x1100 | 1800x1800 | 1200 | 4500 |
| 500 kg (6 persons) | 1m/s | 800x2000 | 950x1300 | 1800x1850 | 1200 | 4500 |
| 750 kg (10 persons) | 1m/s | 800x2000 | 1200x1500 | 1800x2100 | 1200 | 4500 |

Notes

1. Trunk dimensions do not iclude the deck cutting structure, stiffener, insulation etc (Clear trunk dimensions).

2. The Headroom height dimensions apply for Internal Cabin height 2100mm.

3. Please contact KLEEMANN for any other specifications

Description & features

KLEEMANN Marine solutions are ideal for vertical transportation of passengers and goods in private and commercial cruise ships, luxury yachts, ferries, cargo ships and offshore rigs. KLEEMANN offers tailored design options and flexible installation solutions that improve the operational functions and the overall environment of any vessel. Whether durable and reliable installations are required for the movement of heavy-duty freight in harsh environments, or the integration of sheer luxury and dependable functionality, KLEEMANN designs and creates the ideal solutions. Certified according to IACS requirements.

Technical specifications

Standard Dimensions Passenger Elevator (MR/MRL)

| Load Capacity (Persons) | Speed | Entrance Dimensions (mm) | Internal Car Dimensions (mm) | Trunk Dimensions (mm) ¹ | Pit Depth | Headroom Height ² |
|-------------------------|--------|-----------------------------|---------------------------------|---------------------------------------|-----------|---------------------------------|
| | | EWxEH | CWxCD | SWxSD | | |
| 630 kg (8 persons) | 1m/s | 900x2000 | 1100x1400 | 1800x2000 | 950 | 3900 |
| | 1.6m/s | | | | 1250 | 4050 |
| 750 kg (10 persons) | 1m/s | 900x2000 | 1200x1500 | 1900x2050 | 950 | 3900 |
| | 1.6m/s | | | | 1250 | 4050 |
| 1000 kg (14 persons) | 1m/s | 900x2000 | 1100x2100 | 1800x2500 | 950 | 3900 |
| | 1.6m/s | | | | 1250 | 4050 |
| 1600 kg (22 persons) | 1m/s | 1200x2000 | 1500x2300 | 2400x2700 | 1200 | 3900 |
| | 1.6m/s | | | | 1300 | 4050 |
| 2000 kg (27 persons) | 1m/s | 1200x2000 | 1600x2500 | 2500x2900 | 1200 | 3900 |
| | 1.6m/s | | | | 1300 | 4050 |
| 2500 kg (33 persons) | 1m/s | 1200x2000 | 1800x2700 | 2700x3100 | 1200 | 3900 |
| | 1.6m/s | | | | 1300 | 4050 |



www.kleemannlifts.com

KLEEMANN has a worldwide presence in over 100 countries with local presence in key market points. It stands out for its product range, high quality and control standards, world class design and for its expertise in custom made solutions. Constantly monitoring the global market trends, the company continues to innovate, grow, develop, and improve while consistently remaining in tune with its global character.



KLEEMANN HELLAS SA Kilkis Industrial Area P.O. BOX 25, Kilkis, 611 00 - Greece G.E.M.I. 14486435000

While every effort has been made to ensure the accuracy of the information in this brochure, KLEEMANN assumes no responsibility for omissions or typographical errors.

Copyright © KLEEMANN 2024